

Product Name:	RACE PORT
Product Description:	Blow off valve
Product Number:	TS-0204-1001



ABOUT THIS PRODUCT

Thank you for purchasing your new Turbosmart Race Port. This new Blow off valve (BOV) has great features such as high flow capabilities: flows more than 100% more air compared to most BOV's on the market, supports high horsepower applications: 1500HP +, quick release V-band clamp for easy mounting, made from lightweight, aircraft grade billet aluminium and has a variety of springs available to suit different idle vacuum levels.

IMPORTANT NOTES ON YOUR RACE PORT

- Use only silicone hose that is the correct size and pressure/vacuum rating for your application when fitting your Race Port
- Ensure that all plumbing is secured with suitable clamps or the correct fittings are used
- Your Race Port should be mounted at least 100mm from any heat source or adequately shielded
- This product might not work successfully on MAF/Airflow metered cars, please consult your local performance shop for more information
- Check the vacuum level produced by your engine to ensure the right spring is installed in your Race Port for maximum response


RECOMMENDATIONS

- **Turbosmart recommends that your Race Port is fitted and adjusted by an appropriately qualified technician**

HOW TO INSTALL YOUR RACE PORT

- Allow the engine to cool down before installing your Race Port
- Identify a suitable location along the intercooler/intake piping for the Race Port – this will need to be between the outlet of the turbo and the throttle body ideally between the throttle body and the intercooler
- Remove the Race port from the weld on adapter by removing the V-Band clamp. The V-band clamp is removed by rotating the screw until the end of the screw is flush with the end of the V-Band clamp. Grasp the Race Port and push on the bolt head to open the V-Band clamp
- Weld the adapter onto the intake pipe in your ideal position, then allow the adapter to cool down
- Put the V-Band clamp over the adapter before re-installing the O-Ring seal and the Race Port
- Open the V-Band clamp and place in position. Tighten the V-Band clamp screw until it is finger tight then turn an additional 3 turns with an allen key. Be sure not to over tighten the screw as this will cause damage to the V-Band clamp
- Identify a standalone vacuum / pressure source from a port after the throttle body and connect with correctly sized hose to the vacuum/boost port on the cap of the Race Port
- Secure all silicone hose ends with correct clamps
- Start the engine and check for air leaks in the system

RACE PORT DIAGRAM

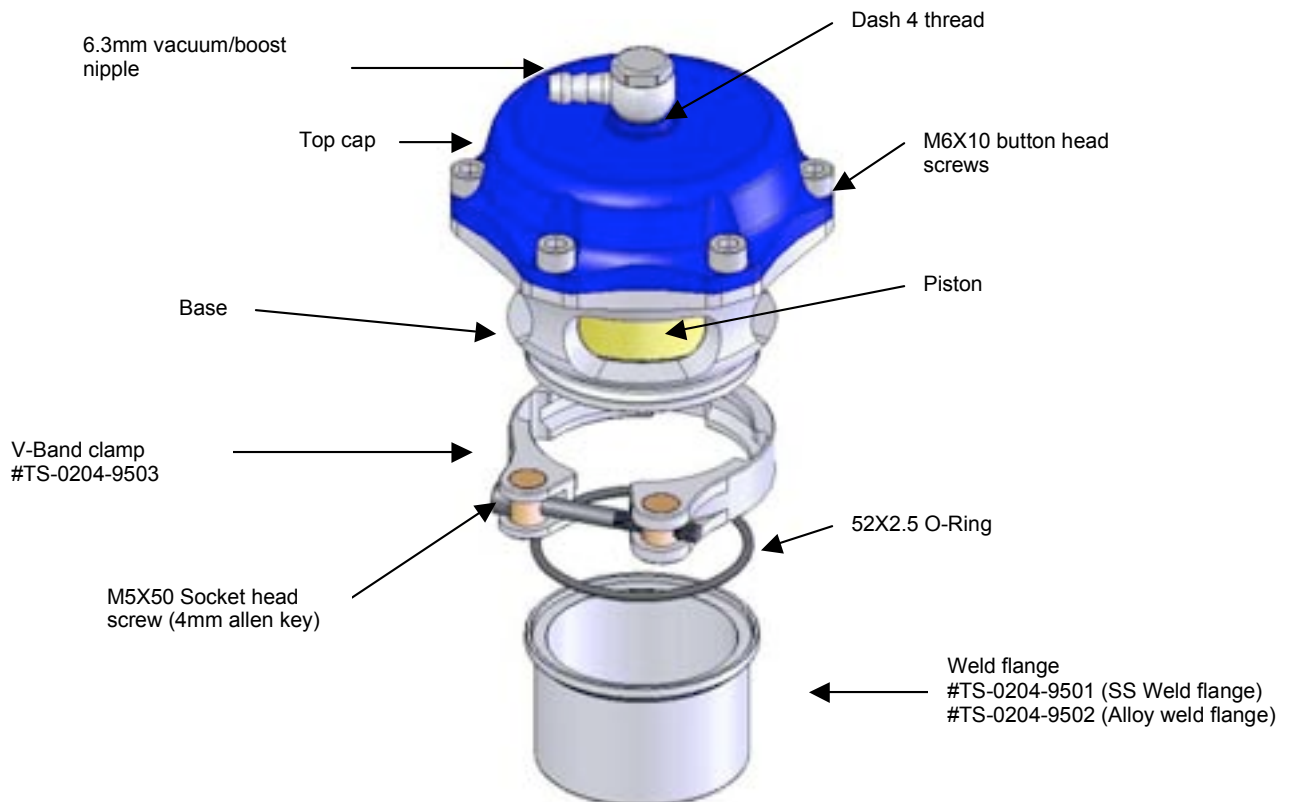

SPRING REPLACEMENT

The Race Port has a variety of springs to suit different vacuum levels. Different tuning levels produce different levels of idle vacuum. The Race Port is fitted with a standard spring which will remain closed until the engine produces more than 20 in/Hg. Using this spring on an engine which produces less vacuum will reduce the response of the Race Port. Turbosmart has a range of springs to suit different vacuum levels to ensure high levels response from the Race Port. Please visit our website – www.turbosmart.com.au for further details.

- Allow the engine to cool down before removing your Race Port from the intake piping
- Remove the dash 4 nipple on the top cap with a 16mm spanner
- Using a press or vice, clamp the top cap to the base ensuring not to damage the cap surface
- Slowly remove the 6 M6X10 button head screws with a 4mm allen key
- The cap is under spring tension, slowly release the clamp to open the Race port
- Replace the spring. Make sure that the diaphragm bead is inside the diaphragm groove on the base
- Align the stem inside the piston and the stem guide in the top cap
- Using a press or a vice, slowly push the cap onto the base, making sure the screw holes in the cap line up with the base
- Replace the 6 M6X10 button head screws and refit the dash 4 vacuum nipple
- Re-install the Race Port onto the intake piping
- Start the engine and check for leaks in the Race port. Make sure the valve is functioning properly by revving the engine and watching the valve piston move

TROUBLE SHOOTING

The following points should be checked if you find that your engine is dipping below normal idle, stalling or if the Race Port is functioning poorly. Please note, the following checks will cure 99% of problems experienced with a Race Port.

- Check the vacuum hose for splits, cracks, loose connection, kinking or any obstruction – old or fatigued hose may collapse under vacuum causing an obstruction
- With the engine running remove the vacuum / pressure hose from the nipple in the cap of the Race Port, there should a loud hissing sound. The engine should idle poorly, double check by covering the end of the hose with your finger – otherwise the hose is blocked
- Ensure that the vacuum / pressure source is not shared and that the vacuum source is directly from the inlet manifold
- Check the seal between the adapter and the Race Port – ensure that there is no gap between the Race Port base and the weld flange
- Check the join between the adapter and the cross over pipe for leaking
- Ensure that the right spring is installed in the Race Port for your engine's vacuum level

The Turbosmart Pledge

TURBOSMART ONE YEAR LIMITED WARRANTY

Turbosmart is a company built on Customer Satisfaction and Service. That is why all of our products go through regimented test procedures before they are packaged and shipped. Turbosmart stands behind its products for one full year after purchase. Terms of Warranty, Service and Returns are as follows:

Limited Warranty: Turbosmart warrants its products to be free from defects in material and workmanship under normal use and if properly installed for a period of one year from date of purchase. If found to be defective, it will be replaced or repaired if returned prepaid along with proof of date of purchase. This shall constitute the sole remedy of your product. Turbosmart appreciates your business and prides ourselves on our customer service. We are always happy to offer you advice and will provide you with help in any way we can. The purpose of this agreement is to avoid any problems or hard feelings.

Service: After the warranty period has expired, repair service is charged based on a minimum and maximum charge rate. (Contact Customer Service for current rate).

Returns: When returning a Turbosmart product for repair, it must be accompanied by a completed Customer Warranty Form and RMA number. To access this form please go to our website www.turbosmartonline.com and you will find it on the Downloads page.

THE TURBOSMART PLEDGE

DO NOT USE ANY TURBOSMART PRODUCT UNTIL YOU HAVE CAREFULLY READ AND UNDERSTOOD THE FOLLOWING AGREEMENT.

Please call if you have any questions or do not understand this agreement. Refer to our brochure, website or catalogue for terms and conditions and further information regarding your product. Turbosmart appreciates your business and prides ourselves on our customer service. We are always happy to offer you advice and will provide you with help in any way we can. The purpose of this agreement is to avoid any problems or hard feelings.

We sometimes make mistakes, as do our dealers, distributors and suppliers. Even customers can sometimes order the wrong parts. Do not use, modify, install, trial assemble, nick, drop, scratch or adjust any part until you first check for any damage. Damage must be reported immediately. NO EXCEPTIONS. If there are any components missing please contact your authorized reseller immediately upon receipt of your shipment. Missing components must be reported within five (5) business days of receipt. Parts returned for any reason MUST BE IN RESALABLE CONDITION. It is YOUR responsibility, "THE CUSTOMER" to carefully package any returns to avoid shipping damage. Insurance is highly recommended. Credit cannot be issued for damaged goods.

Turbosmart warrants the quality of the products it designs and manufactures to be free of defects in material and workmanship. This limited warranty is extended only to the original purchaser and may not be transferred or assigned. This limited warranty applies to any product, which after careful inspection by Turbosmart, after receipt of the product from our authorized reseller, is found to have a defect in either material or workmanship. Any modifications to the product will void any and all warranties and will not be exchanged. Before installation, check new car warranty. Turbosmart is not responsible for voiding any original manufacturer's warranty.

All warranty claims must be returned to the nearest Turbosmart Office, you must return the product and sales receipt, at your own expense, accompanied by the Customer Warranty Form stating the reason for the claim. Proof of purchase must be provided with any warranty claim and will be verified with the authorized reseller from which the product was purchased.

If all the above procedures are followed, and the product is found to be defective in either workmanship or material, Turbosmart shall either repair or replace the product, at its sole discretion, and sole cost. This limited warranty does not cover or apply to any personal injury, labor charges or any other incidental costs or damages caused by the defective product. The individual purchaser acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the individual purchaser agrees to indemnify Turbosmart and to hold Turbosmart harmless for any claim related to the item of the equipment purchased. Under no circumstances will Turbosmart be liable for any damages or expenses by reason of use or sale of any such equipment.

THIS LIMITED WARRANTY IS THE ONLY EXPRESS WARRANTY, WHICH APPLIES TO TURBOSMART PRODUCT AS EXPRESSLY GIVEN IN LIEU OF ANY OTHER WARRANTY EXPRESSED OR IMPLIED, INCLUDING THAT OF MERCHANTABILITY. ANY IMPLIED WARRANTY INCLUDING THAT OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE IS HEREBY LIMITED BY THE SAME TERMS AND TIME LIMITATIONS SET FORTH IN THIS LIMITED EXPRESS WARRANTY AND OTHERWISE EXCLUDED. EXCEPT FOR THOSE OBLIGATIONS ASSUMED HEREIN, TURBOSMART ASSUMES NO OTHER OBLIGATIONS IN CONNECTION WITH THE SALE OF ITS PRODUCTS.

IN THE EVENT THAT THE INDIVIDUAL PURCHASER DOES NOT AGREE WITH THIS AGREEMENT THE BUYER MAY PROMPTLY RETURN THIS PRODUCT, IN A NEW AND UN-USED CONDITION, WITH A DATED PROOF OF PURCHASE, TO THE PLACE OF PURCHASE WITHIN SEVEN (7) DAYS FROM THE DATE OF PURCHASE FOR A FULL REFUND. THE INSTALLATION OF THIS PRODUCT INDICATES THAT THE INDIVIDUAL PURCHASER HAS READ AND UNDERSTOOD THIS AGREEMENT AND ACCEPTS ITS TERMS AND CONDITIONS.

Happy motoring!
The Turbosmart Team.

Head Office: Turbosmart Pty Limited, PO Box 264 Croydon, NSW, 2132 Australia
USA Office: Turbosmart USA, 1185 Park Center Drive, Suite Q, Vista CA 92081 USA

Ph: +61 (2) 9798 2866
Ph: (760) 727 7610

Fax: +61 (2) 9798 2826
Fax: (760) 727 7963

Email: info@turbosmart.com.au
Email: sales@turbosmartusa.com